GASTROPARTS

Universal Catalogue › Electric Components ›

[EN] Solenoid valves

[DE] Magnetventile

[ES] Válvulas magnéticas

[FR] Électrovannes

[IT] Elettrovalvole

[PL] Elektrozawory

[RU] Электромагнитные клапаны

gastroparts@gastroparts.com

tel. +48 56 657 00 66

fb.com/gastroparts.global

GASTROPARTS.COM

solenoid valves

20

solenoid valves (water). 650
drain valves. 666
solenoid valves (gas). 667
solenoid valves (refrigeration). 668
solenoid valves for vacuum machines 669

solenoid valves

solenoid valves (water)

EATON/INVENSYS

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	370723	single	24	3/4”	11.5	DN10
1	370753	single	24	3/4”	6	DN10
1	372017	single	230	3/4”	11.5	DN10
1	372018	single	230	3/4”	14	DN10
1	372046	single	230	3/4”	14	DN10
2	372003	single	230	3/4”	10	DN10
3	370724	double	24	3/4”	11.5	DN10
3	372021	double	230	3/4”	11.5	DN10
3	372022	double	230	3/4”	14	DN10

4

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
4	372025	triple	230	3/4”	11.5	DN10

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	372015	single	230	3/4”	11.5	DN10
1	372016	single	230	3/4”	14	DN10
2	372019	double	230	3/4”	11.5	DN10
2	372020	double	230	3/4”	14	DN10
3	372023	triple	230	3/4”	11.5	DN10

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size	CL (mm)
1	370370	single	230	3/4”	11.5	DN10	2000
2	370372	single	230	3/4”	11.5	DN10	2000
3	370371	double	230	3/4”	11.5	DN10	2000

with coded terminal

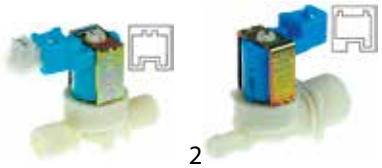
1 2

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
1	370270	single	3/8”	3/8”	DN10
2	370267	single	3/4”	11.5	DN10

3 4

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
3	370268	single	3/4”	11.5	DN10
4	370355	single	3/4”	11.5	DN10

5 6

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
5	370671	single	3/4”	11.5	DN10
6	370266	double	3/4”	11.5	DN10

7

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
7	370269	double	3/4”	11.5	DN10

spare parts and accessories

solenoid coils

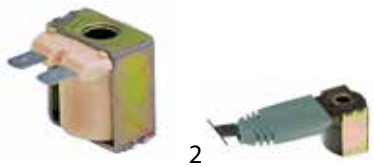
1 2

fig.	Part No.	volt. (V)	voltage
1	371132	24	AC
1	371131	230	AC

fig.	Part No.	volt. (V)	voltage
2	371081	230	AC

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

solenoid coils with coded terminal

1

2

3

fig.	Part No.	volt. (V)	voltage
1	371133	230	AC
2	371134	230	AC
3	371174	230	AC

4

fig.	Part No.	volt. (V)	voltage
4	371175	230	AC

reducers

outlet side

1

technical data:
pressure range 0 up to 10bar
tolerance ±15/25%

fig.	Part No.	flow rate (l/min)	colour
1	371250	0.25	white
1	371251	0.5	yellow
1	371252	1.2	blue
1	371253	2.5	brown
1	371254	3.3	violet
1	371255	5	black

inlet side

1

technical data:
type EATON (INVENSYS)
tolerance ±15/25%

fig.	Part No.	flow rate (l/min)	pressure range (bar)	colour
1	371241	5.5	1-10	yellow
1	371243	10	1-10	white
1	371244	12	0 up to 10	white

ELBI

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

straight

1

2

3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	373017	single	230	3/4"	11.5	DN10
1	373018	single	230	3/4"	14	DN10
2	373021	double	230	3/4"	11.5	DN10
2	373022	double	230	3/4"	14	DN10
3	373025	triple	230	3/4"	11.5	DN10

angled

1

2

3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	374072	single	24	3/4"	11.5	
2	370733	single	24	3/4"	11.5	DN10
2	373015	single	230	3/4"	11.5	DN10
2	373016	single	230	3/4"	14	DN10
3	370712	double	24	3/4"	11.5	DN10
3	373019	double	230	3/4"	11.5	DN10

4

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
4	373023	triple	230	3/4"	11.5	DN10

spare parts and accessories

solenoid coils

1

2

fig.	Part No.	volt. (V)	voltage
1	371014	24	AC
2	371016	230	AC

ELTEK

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

1

2

3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	370750	single	230	3/4"	11.5	DN10
1	370779	single	230	3/4	11.5	DN10
2	370781	double	230	3/4	11.5	DN10
3	370780	double	230	3/4	11.5	DN10
3	370778	double	230	3/4	11.5	DN10

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

INTERELEKTRIK

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

1

fig.	Part No.	volt. (V)	inlet	outlet (mm)
1	370688	220/240	3/4"	13.5

with reducers

1

2

fig.	Part No.	volt. (V)	inlet	outlet (mm)	input (l/min)	output (l/min)
1	370675	230	3/4"	10.5	5	
1	370676	230	3/4"	10.5	15	
1	370746	220/240	3/4"	10.5		3
2	370747	220/240	3/4"	10.5		

MÜLLER

medium temperature: 90°C
duty cycle: 100%

1

2

3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	370751	single	24	3/4"	3/4"	DN10
1	370005	single	230	1/2"	1/2"	DN10
1	370007	single	230	3/4"	3/4"	DN10
1	370173	single	230	3/4"	3/4"	DN17
2	370002	single	230	3/4"	14.5	DN10
2	370117	single	230	3/4"	11.5	DN10
3	370715	single	230	3/4"	3/8"	DN10

4

5

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
4	370004	double	230	3/4"	14.5	DN10
4	370158	double	230	3/4"	11.5	DN10
5	370008	triple	230	3/4"	14.5	DN10
5	370172	triple	230	3/4"	11.5	DN10

1

2

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
1	370001	single	3/4"	14.5	DN10
1	370074	single	3/4"	11.5	DN10
2	370003	double	3/4"	14.5	DN10
2	370094	double	3/4"	11.5	DN10

3

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
3	370000	triple	3/4"	14.5	DN10

with cable connection

1

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size	CL (mm)
1	370006	triple	3/4"	12.5	DN10	2000

1

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size	CL (mm)
1	370369	single	3/4"	14.5	DN10	2000

spare parts and accessories

valve bodies

1

2

3

fig.	Part No.	version	inlet	outlet (mm)	nominal size
1	370127	single	3/4"	14.5	DN10
1	370133	single	3/4"	11.5	DN10
2	370667	single	3/4"	3/4"	DN10
3	370179	single	3/4"	3/4"	DN17

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

fig.	Part No.	version	inlet	outlet (mm)	nominal size
4	370129	double	3/4"	14.5	DN10
4	370195	double	3/4"	11.5	DN10
5	370131	triple	3/4"	14.5	DN10
5	370132	triple	3/4"	11.5	DN10

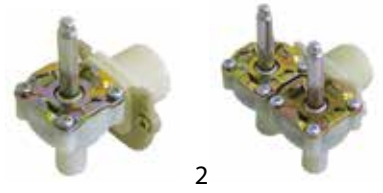

technical data:
voltage 230V

fig.	Part No.	version	inlet	outlet (mm)	nominal size
1	370126	single	3/4"	14.5	DN10
1	370193	single	3/4"	11.5	DN10
2	370128	double	3/4"	14.5	DN10

spare parts sets

fig.	Part No.	description
1	371011	spare parts kit 8 MÜLLER

solenoid coils

fig.	Part No.	volt. (V)	voltage	connection
1	371037	24	AC	F6.3
1	370570	24	DC	F6.3
1	371017	230	AC	F6.3
2	371038	230	AC	appliance plug

reducers

outlet side

technical data:
type MR05
mounting measurements 9,5mm
nominal flow at 4bar
pressure range 1-10bar
approval KTW

fig.	Part No.	flow rate (l/min)	tolerance (%)	colour
1	371275	3	±20	violet
1	371277	5	±20	red

inlet side

technical data:
type MR04
mounting measurements 19mm
nominal flow at 4bar
approval KTW

fig.	Part No.	flow rate (l/min)	pressure range (bar)	tolerance (%)	colour
1	371200	5	0 up to 10	±15	red
1	371201	8	0 up to 10	±15	black
1	371202	10	0 up to 10	±15	white
1	371203	12	1-10	±15	orange
1	371204	14	1-10	±15	light blue
1	371205	15	1-10	±15	violet

technical data:
type MR06
mounting measurements 19mm
nominal flow at 4bar
approval KTW

fig.	Part No.	flow rate (l/min)	pressure range (bar)	tolerance (%)	colour
1	371210	0.5	1-10	±50	yellow
1	371211	1	1-10	±30	pink
1	371213	1.9	1-10	±25	black
1	371214	2.5	1-10	±20	green
1	371215	3	1-10	±20	violet
1	371216	3.5	0 up to 10	±20	dark blue

filters

fig.	Part No.	description
1	370551	screen for solenoid valve ø 12mm L 24mm
2	371122	solenoid valve filter ø 19mm H 10mm
3	501064	solenoid valve filter SS filter

miscellaneous

fig.	Part No.	description
1	371009	compression spring for solenoid coil
2	371002	solenoid valve holder flange support

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

RPE

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	374067	single	230	3/8”	3/8”	DN10
1	370123	single	230	1/2”	1/2”	DN10
1	374068	single	230	3/4”	3/4”	DN10
2	374063	single	230	3/8” IT	3/8” IT	DN11
3	370009	single	230	3/4”	3/4”	DN10

4 5 6

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
4	374017	single	230	3/4”	10	DN10
4	374006	single	230	3/4”	13	DN10
5	370441	single	-	3/4”		
6	370758	double	24	3/4”	10	DN10
6	374021	double	230	3/4”	10	DN10
6	374022	double	230	3/4”	13	DN10

7 8 9

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
7	370760	double	24	3/4”	10	DN10
8	370379	double	230	3/4”	1/4”	DN10
9	374025	triple	230	3/4”	10	DN10

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	374060	single	24	3/4”	13	DN10
1	374016	single	230	3/4”	13	DN10
2	374015	single	230	3/4”	10	DN10
3	374019	double	230	3/4”	10	DN10
3	374020	double	230	3/4”	13	DN10

4 5

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
4	371148	triple	230	3/4”	13	DN10
5	374027	4-fold	230	3/4”	10	DN10

JOHN GUEST

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
1	370771	single	230	3/4”	JG 8
1	374064	single	230	3/4”	JG 10
2	374070	single	230	JG 10	JG 10
2	374069	single	230	JG 8	JG 8
3	370772	double	230	3/4”	JG 8
3	374065	double	230	3/4”	JG 10

4

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
4	370773	triple	230	3/4”	JG 8
4	374066	triple	230	3/4”	JG 10

1 2 3

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
1	370768[1]	single	230	3/4”	10
2	370769[1]	double	230	3/4”	10
3	374077[1]	double	230	3/4”	10

[1]cylindrical outlet

4

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
4	370770[1]	triple	230	3/4”	10

[1]cylindrical outlet

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

special outlet

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
1	371229	single	24	3/4”	6.5
2	371228	double	24	3/4”	6.5
3	371227	triple	24	3/4	6.5

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)
4	370453	single	230	11.5	11.5

reducers

outlet side

pos.	Part No.	flow rate (l/min)	colour
1	371269	0.15	brown
2	371266	0.2	red
3	371268	0.25	green
4	371265	3	black
5	374084	7-10	orange
6	374088	0.6-0.7	grey
7	371249	0.7-1	light grey
8	371248	1.0-1.25	white
9	374087	1.5-1.85	yellow
10	374086	1.85-2.35	violet
11	374085	4.5-6	blue

inlet side

fig.	Part No.	flow rate (l/min)	colour
1	371256	10-12	white
1	374083	18.5-20	black
1	374080	4-4.5	yellow

fig.	Part No.	flow rate (l/min)	colour
1	374081	6-7	red
1	374082	7-8.5	brown
2	371257	18.5-20	grey

solenoid coils

fig.	Part No.	volt. (V)	voltage
1	370774	24	AC

fig.	Part No.	volt. (V)	voltage
1	371015	230	AC

TP

medium temperature: 90°C 90°C 60°C
ambient temperature: 60°C 25°C 60°C
duty cycle: 40% 100% 100%

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	370029	single	24	3/4”	11.5	DN10
1	370032	single	24	3/4”	14	DN10
1	370017	single	230	3/4”	11.5	DN10
1	370018	single	230	3/4”	14	DN10
2	370111	double	24	3/4”	11.5	DN10
2	370112	double	24	3/4”	14	DN10
2	370022	double	230	3/4”	14	DN10
2	370021	double	230	3/4”	11.5	DN10
3	370115	triple	24	3/4”	11.5	DN10
3	370025	triple	230	3/4”	11.5	DN10
3	370026	triple	230	3/4”	14	DN10

fig.	Part No.	version	volt. (V)	inlet	outlet (mm)	nominal size
1	370030	single	24	3/4”	11.5	DN10
1	370031	single	24	3/4”	14	DN10
1	370015	single	230	3/4”	11.5	DN10
1	370016	single	230	3/4”	14	DN10
2	370109	double	24	3/4”	11.5	DN10
2	370110	double	24	3/4”	14	DN10
2	370019	double	230	3/4”	11.5	DN10
2	370020	double	230	3/4”	14	DN10
3	370113	triple	24	3/4”	11.5	DN10
3	370023	triple	230	3/4”	11.5	DN10
3	370024	triple	230	3/4”	14	DN10

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

spare parts and accessories

solenoid coils

1

fig.	Part No.	volt. (V)	voltage
1	371035	24	AC
1	371156	24	DC

fig.	Part No.	volt. (V)	voltage
1	371013	230	AC
1	371199	230	AC

reducers

outlet side

1 2

fig.	Part No.	flow rate (l/min)	tolerance (%)	colour
1	691081	0.25	±25	green
1	691080	3	±25	light green
1	691082	8	±25	violet
2	371230	0.25	±25	red
2	371233	0.8	±25	white
2	371234	1	±25	light blue
2	371235	1.2	±25	brown
2	371236	1.5	±25	light brown
2	371237	2.5	±25	yellow
2	371238	3.4	±25	dark green
2	371239	5	±25	black

inlet side

1

fig.	Part No.	flow rate (l/min)	tolerance (%)	colour
1	371220	3	±15	red
1	371221	5.5	±15	yellow
1	371222	6	±15	grey
1	371223	10	±15	white
1	371224	12	±15	blue
1	371226	20	±15	brilliant-red
1	371218	20	±15	orange

various

1 2 3

fig.	Part No.	description
1	370310	solenoid valve 2-fold, with reducer straight
2	370673	solenoid valve 3-way 230V BÜRKERT
3	370726	solenoid valve double straight 220-240V AC inlet 11 outlet 11mm plastic MILANO output B red

4 5 6

fig.	Part No.	description
4	370641	solenoid valve plastic 220-240V inlet 10mm outlet 10mm
5	370596	solenoid valve plastic 230V AC
6	370636	solenoid valve single 2-ways 230V inlet 10,5mm outlet 10,5mm MILANO 00168401 plastic

7 8 9

fig.	Part No.	description
7	370650	solenoid valve single angled 220/240V outlet 11mm inlet 12,4mm 50/60Hz
8	371141	solenoid valve single angled 240V inlet 15mm outlet 11,5mm
9	370493	solenoid valve single angled 24V inlet 5/8" UNFmm outlet 11,5mm EATON (INVENSYS) plastic

10 11 12

fig.	Part No.	description
10	370156	solenoid valve single straight
11	370487	solenoid valve single straight 24V AC inlet 3/4" outlet 11,5mm DN10 t.max. 25°C duty cycle 100%
12	372216	solenoid valve with pressure switch single, angled 230V inlet ¾"mm outlet 11mm

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

metal

ASCO

2-way

1

2

3

4

fig.	Part No.	supply	connection	DN (mm)	slide-on receptacle	temp. (°C)	coil type	membranes	p max (bar)
1	370509	24 VAC	1/2"	12.5	DIN	-20° up to 85		NBR (water)	7
2	370786	230 VAC	1/2"				238613-059		
3	370121	230 VAC	1/2"	16	DIN	-20° up to 85	400425-217	NBR (water)	9
3	370198	230 VAC	3/4"	19	DIN	-20° up to 85	400425-117	NBR (water)	20
4	370124	230VAC		16	DIN	-20° up to 85	400325-110	NBR (water)	10

3-way

1

technical data:
temperature range -20 up to +90°C
membranes NBR (water)
pressure max 3bar

fig.	Part No.	description	supply	connection	L (mm)	DN (mm)
1	370510	solenoid valve brass 3-ways 24V AC L 43mm ¼"	24 VAC	1/4"	43	4.4

solenoid valves steam (water)

2-way

1

2

3

technical data:
slide-on receptacle DIN

fig.	Part No.	supply	connection	DN (mm)	temp. (°C)	coil type	membranes	p max (bar)
1	370728	24 VAC	1/2"	12	-10 up to +85	43005421	NBR	10
2	370134[1]	230 VAC	1/2"	9.5	-20° up to 135	400425-117	PTFE (water/steam)	2
3	370260	230 VAC	1/2"	16	-20° up to 184	400426-217	PTFE (water/steam)	9
3	370258[1]	230 VAC	3/4"	19	-20° up to 184	400425-117	PTFE (water/steam)	9

[1]off-current open

spare parts and accessories

solenoid coils

1

fig.	Part No.	volt. (V)	voltage	coil type
1	371136	230	AC	400425-217

O-rings

1

2

fig.	Part No.	ID ø (mm)	Qty (pcs)	fig.	Part No.	ID ø (mm)	Qty (pcs)
1	371095	6.07	1	2	371100	6.07	1

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

power sockets

1

fig.	Part No.	plug type	CL (mm)	features
1	371093	compact	1100	small

BÜRKERT

2-way

6213 series

1

2

technical data:
slide-on receptacle DIN
temperature range -30° up to 120°C
membranes EPDM
pressure max 10bar

fig.	Part No.	supply	connection	DN (mm)
1	370274	230 VAC	1/2"	10
2	370275	230 VAC	3/4"	13

solenoid valves steam (water)

2-way

0406 series

1

technical data:
slide-on receptacle
temperature range 180°C
pressure max bar

fig.	Part No.	supply	connection	DN (mm)	membranes
1	370276	230 VAC	1/2"	12	PTFE

solenoid valves (various)

1

2

3

fig.	Part No.	description
1	370143	solenoid valve 2-way 196V DC BÜRKERT
2	370741	solenoid valve 2-ways 230 VAC inlet ½" IT
3	370464	solenoid valve brass 2-ways 24V AC connection ½"

4

fig.	Part No.	description
4	370544	solenoid valve brass 2-ways 24V inlet ½" outlet ½"

CEME

solenoid valves

1

2

3

fig.	Part No.	description
1	370348	solenoid valve 2-ways 230 VAC connection ½" L 60mm
2	370352	solenoid valve 2-ways 230 VAC inlet ½" IT
3	370633	solenoid valve brass 3-ways 230V AC

4

fig.	Part No.	description
4	370238	solenoid valve brass 3-ways coffee machine parts

accessories

1

2

3

fig.	Part No.	description
1	371189	solenoid coil 240V seat ø 13mm
2	371154	solenoid coil CEME type 1W7 230V AC 50Hz
3	371188	solenoid coil type H 230V 17VA 50Hz seat ø 13mm

LUCIFER

2-way

121K series

1

2

technical data:
temperature range -20° up to 130°C

fig.	Part No.	supply	connection	DN (mm)	coil type	membranes	p max (bar)
1	370224	24 VAC	1/8"	3	DZ02A2	FKM (water)	10
1	370072	230 VAC	1/8"	3	DZ06S6	FKM (water)	10
1	370088	230 VAC	1/4"	3	DZ06S6	FKM (water)	10
2	370708	230 VAC	1/4"	5		EPDM	7

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

121Z series

1

technical data:
length mm
nominal size 2,5mm
slide-on receptacle DIN
temperature range -20° up to 130°C
pressure max 10bar

fig.	Part No.	supply	connection	coil type	membranes
1	370230	24VDC	1/8"	DZ02C2	FKM (water)
1	370071	230 VAC	1/8"	DZ06S6	FKM (water)

7321(PM133) series

1

technical data:
length 100mm
nominal size 20mm
slide-on receptacle DIN
temperature range fixed 90°C
pressure max 20bar

fig.	Part No.	supply	connection	coil type	membranes
1	371184	24 VAC	3/4"	DZ02A2	NBR (water)
1	371183	230 VAC	3/4"	DZ06S6	NBR (water)

2-way

121F series

1

technical data:
number of ways 2-ways
supply 230 VAC
nominal size 3,5mm
slide-on receptacle DIN
temperature range -10 up to 140°C
pressure max 10bar
flange size 32x32mm

fig.	Part No.	coil type	membranes
1	370211	DZ06S6	ruby

7321(PM143) series

1

technical data:
slide-on receptacle DIN
temperature range fixed 140°C
membranes EPDM (steam/water)
pressure max 10bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	371186	230 VAC	1/2"	12	DZ06S6
1	371187	230 VAC	3/4"	20	DZ06S6

1

technical data:
slide-on receptacle DIN
temperature range fixed 90°C
membranes NBR (water)
pressure max 20bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	371182	24 VAC	1/2"	12	DZ02A2
1	371179	230 VAC	3/8"	12	DZ06S6
1	371181	230 VAC	1/2"	12	DZ06S6

3-way

131F series

1

2

technical data:
temperature range -10 up to 140°C
pressure max 10bar
flange size 32x32mm

fig.	Part No.	supply	DN (mm)	coil type	membranes
1	370054	24 VAC	2.5	DZ06P0	FKM (water/steam)
1	370051	24VDC	2.5	DZ02C2	FKM (water/steam)
2	370593[1]	24 VAC	1.5/2.5	483510P0 XS03M F	ruby

[1]nickel-plated

3

4

technical data:
temperature range -10 up to 140°C
pressure max 10bar
flange size 32x32mm

fig.	Part No.	supply	DN (mm)	coil type	membranes
3	370053	230 VAC	2.5	DZ06S6	FKM (water/steam)
4	370776	230 VAC	1.5/2.5	DZ06S6	ruby

spare parts and accessories

solenoid coils

1

2

3

fig.	Part No.	volt. (V)	voltage	power (VA)	coil type
1	371031	230	AC	9	DZ06S6
1	371032	24	AC	9	DZ06P0
1	371043	24	DC	9	DZ02C2
2	371083	24	AC	9	DZ02A2
3	371258	220	AC	14	EZ92A7

valve bodies

1

fig.	Part No.	description
1	370061	solenoid valve body LUCIFER-PARKER 3-ways

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

M&M

2-way

B-240 series

1

technical data:
temperature range -20° up to 130°C
coil type 2700
membranes FKM (water)
pressure max 18bar
pressure min 0bar

fig.	Part No.	supply	DN (mm)	flange (mm)
1	370068	230 VAC	1.5	32x32

B-297 series

1

technical data:
temperature range -10 up to 130°C
coil type 2700
membranes FKM (water)
pressure max 5bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370096	230 VAC	1/8"	30	2.5

B204/205/206 series

1

technical data:
temperature range -10 up to +90°C
coil type 2700
membranes NBR (water)
pressure max 16bar
pressure min 0,3bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370075	230 VAC	1/2"	67	12
1	370076	230 VAC	3/4"	82	25

D-249 series

1

technical data:
temperature range -20° up to 130°C
coil type 8700
membranes FKM (water)
pressure max 8bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370098	230 VAC	1/4"	38	3

D-287/288/289/290/292/293 series

1

technical data:
temperature range -10 up to 130°C
coil type 7700
membranes FKM (water)
pressure max 16bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370044	230 VAC	3/4"	85	15

3-way

B-397 series

1

technical data:
temperature range -20° up to 130°C
coil type 2700
membranes FKM (water)
pressure max 10bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370214	230 VAC	1/8"	30	1.5

spare parts and accessories

solenoid coils

1

2

fig.	Part No.	volt. (V)	voltage	power (VA)	coil type
1	371023	24	AC	10	2200
1	371027	24	AC	18	7200/7201
1	371022	230	AC	10	2700
1	371026	230	AC	18	7700
2	371024	230	AC	12	8700

MÜLLER

2-way

1

2

fig.	Part No.	supply	inlet	outlet	L (mm)	version
1	370069[1]	230 VAC	1/8" IT	1/8" IT	30	water
2	370036	230 VAC	3/4" ET	1/2" IT	57	water

[1]with adjusting screw

ODE

2-way

1

technical data:
supply 230 VAC
temperature range -10 up to +90°C

fig.	Part No.	connection	L (mm)	DN (mm)
1	370653	1/2"	66	13

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

solenoid valves steam (water)

212A series

1

technical data:
length 46mm
temperature range °C
pressure max 5bar
pressure min bar

fig.	Part No.	supply	connection	DN (mm)	coil type	membranes
1	370719	230 VAC	female faston 6.3mm	4.5	BDA	

21A series

1

technical data:
length 40mm
temperature range -10 up to 140°C
membranes FKM (water/steam)

fig.	Part No.	supply	connection	DN (mm)	coil type	p max (bar)
1	370208	230 VAC	1/8”	2.5	BDA	14
1	370145	230 VAC	1/4”	3	BDV	10

21J series

1

technical data:
length 30mm
temperature range -10 up to 140°C
pressure max 18bar

fig.	Part No.	supply	connection	DN (mm)	membranes
1	370232	230 VAC	1/8”	2.3	FKM

31A series

1

technical data:
length 40mm
temperature range -10 up to 140°C
membranes FKM (water/steam)
pressure max 10bar
pressure min bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370616	230 VAC	1/4”	2	BDA

31A1 series

1

technical data:
temperature range -10 up to 140°C
flange size 32x32mm

fig.	Part No.	supply	DN (mm)	coil type	membranes	p max (bar)
1	370583	24 VAC	1.5	BDA	ruby	15
1	370125	24VDC	2.5	BDA	FKM (water/steam)	6
1	370203	230 VAC	2.5	BDV	FKM (water/steam)	6

5005A series

1

technical data:
membranes FKM (water/steam)
pressure max 15bar

fig.	Part No.	supply	DN (mm)	temp. (°C)	coil type
1	370541	230VAC	1.5	-10 up to 140	BDA

spare parts and accessories

gaskets

1

fig.	Part No.	ø (mm)	application
1	371196	12	for valve body

solenoid coils

1

fig.	Part No.	volt. (V)	voltage	power (VA)	seat ø (mm)
1	371152	24	DC	8	12
1	371150	230	AC	8	13.5
1	371191	230	AC	10	10

valve inserts

1

2

fig.	Part No.	L (mm)	ø (mm)	gasket
1	371195	24	9	Viton

fig.	Part No.	L (mm)	ø (mm)	gasket
2	371193	30	12	Viton

valve bodies

1

2

fig.	Part No.	description	ø (mm)
1	371194	solenoid valve body ø 10mm	10
2	371192	solenoid valve body ø 13mm	13

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

PARKER

2-way

7121 series

1

2

technical data:
pressure max 15bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370584	230 VAC	1/8”	1.5	BDA
2	370767	220-240VAC	1/8”	1.5	483510S6 XS03XS6 F

N74.BV series

1

technical data:
temperature range -10 up to 140°C
pressure max 15bar

fig.	Part No.	supply	connection	DN (mm)	coil type	membranes
1	374061	230VAC	1/8”	2	WB4.5	FKM (water/steam)

VE-123 series

1

technical data:
temperature range -10 up to 140°C
membranes Viton
pressure max 5bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370727	230 VAC	1/2”	72	13	ZB09

VE-125 series

1

technical data:
slide-on receptacle DIN
temperature range -20° up to 130°C
membranes FKM (water)
pressure max 10bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370202	230 VAC	-	2.5	ZB09

VE-131 series

1

technical data:
slide-on receptacle
temperature range °C
membranes
pressure max bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370549	230 VAC	-	-	KT09

VE-140 series

1

2

technical data:
slide-on receptacle DIN
temperature range -10 up to 140°C
coil type ZB09
membranes ruby

fig.	Part No.	supply	connection	DN (mm)	p max (bar)
1	370140	230 VAC	1/8”	2.5	
2	370220	230 VAC	1/8”	2.5	30

3

technical data:
slide-on receptacle DIN
temperature range -10 up to 140°C
coil type ZB09
membranes ruby

fig.	Part No.	supply	connection	DN (mm)	p max (bar)
3	370141[1]	230 VAC	1/4”	3	8

[1]SS housing

E-146 series

1

technical data:
slide-on receptacle DIN
temperature range -20° up to 130°C
membranes FKM (water)

fig.	Part No.	supply	connection	DN (mm)	coil type	p max (bar)
1	370066	24 VAC	1/8”	2.5	ZB09	15
1	370034	24 VAC	1/4”	3	ZB09	10
1	370221	24VDC	1/4”	3	ZB12	8
1	370206	230 VAC	1/8”	2.5	ZB09	15
1	370303	230 VAC	1/8”	3	ZB09	10
1	370067	230 VAC	1/4”	3	ZB09	7

VE-161 series

1

technical data:
slide-on receptacle
temperature range -10 up to 140°C
membranes FKM
pressure max 10bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370566	230 VAC	1/4”	2.20	KT09

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

VE-175BV series

1

technical data:
temperature range -10 up to 140°C
membranes FKM (water/ steam)
pressure max 15bar
pressure min 0bar

fig.	Part No.	supply	connection	DN (mm)	coil type
1	370576	230 VAC	-	2	WB4.5

3-way

121 KS8358 series

1

fig.	Part No.	description
1	370709	solenoid valve brass 3-ways 230V AC

301X series

1

fig.	Part No.	supply	connection	DN (mm)	temp. (°C)
1	370785	24 VAC	-	-	-10° up to +140

N79.6QV series

1

technical data:
slide-on receptacle
temperature range -10 up to 140°C
membranes FKM (water/ steam)
pressure max 15bar

fig.	Part No.	supply	DN (mm)	coil type
1	374062	230VAC	1	WB4.5

VE-128 series

1

2

technical data:
slide-on receptacle DIN
temperature range -20° up to 140°C
pressure max 10bar

fig.	Part No.	supply	DN (mm)	coil type	membranes
1	370050	24 VAC	1.2	ZB09	ruby
1	370058	24VDC	1.2	ZB12	ruby
1	370057	230 VAC	1.2	ZB09	ruby
2	370587	230 VAC	1.20	ZB09	ruby

3

4

technical data:
slide-on receptacle DIN
temperature range -20° up to 140°C
pressure max 10bar

fig.	Part No.	supply	DN (mm)	coil type	membranes
3	370060	230 VAC	1.2	YB09 with cable	Viton
4	370759	230 VAC	1.2	ZB09	ruby

VE-141 series

1

technical data:
slide-on receptacle DIN
temperature range -20° up to 130°C
membranes FKM (water)

fig.	Part No.	supply	connection	DN (mm)	coil type	p max (bar)
1	370212	230 VAC	1/8"	2	ZB09	10
1	370059	230 VAC	1/4"	2	ZB09	10
1	370550	230 VAC	1/4"	3	ZB09	3
1	374076	230VAC	1/4"	2.5	ZB09	0

VE-148 series

1

technical data:
temperature range -10° up to +140°C

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370718	230 VAC	1/8"	30	-

solenoid valves (various)

1

2

3

fig.	Part No.	description
1	370497	solenoid valve 2-ways 230 VAC connection 1/8"
1	370749	solenoid valve 2-ways 230 VAC inlet 1/8"
2	526331	solenoid valve 2-ways 230 VAC connection 1/8"
3	370525	solenoid valve brass 3-ways 110V AC

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

spare parts and accessories

solenoid coils

1

2

3

4

fig.	Part No.	description
1	371082	solenoid coil 110V AC 9VA 60Hz coil type ZB09UL
2	371098	solenoid coil 230V 14W cable length 1000mm
3	371036	solenoid coil 24V AC 9VA coil type ZB09
3	371030	solenoid coil 24V DC 12VA coil type ZB12
4	371033	solenoid coil PARKER 230V 9VA

5

fig.	Part No.	description
5	371029	solenoid coil PARKER 230V 9VA coil type ZB09

valve bodies

1

2

fig.	Part No.	description
1	370063	solenoid valve body PARKER 3-ways inner cone
2	370062	solenoid valve body PARKER 3-ways outer cone

SIRAI

2-way

L140-B series

1

technical data:
temperature range -10 up to +90°C
membranes NBR (water)
pressure max 12bar
pressure min 0,35bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370320	24 VAC	1/2"	41	10	Z610A
1	370239	230 VAC	1/2"	41	10	Z610A

L171-D series

1

technical data:
temperature range -10 up to 100°C
membranes EPDM (water)
pressure max 7bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370086	24 VAC	1/4"	43	3	Z610A
1	370083	230 VAC	1/4"	43	3	Z610A

L177-B series

1

technical data:
temperature range -10 up to +90°C
membranes NBR (water)
pressure max 30bar
pressure min 0bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370082	230 VAC	1/8"	26.5	2.3	Z610A

L180-B series

1

technical data:
temperature range -10 up to +90°C
membranes NBR (water)
pressure max 12bar
pressure min 0,35bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370328	24 VAC	3/8"	60	11.5	Z610A
1	370329	24 VAC	1/2"	66	13.5	Z610A
1	370391	24 VAC	3/4"	79	18	Z610A
1	370305	24VDC	1/2"	66	13.5	Z610A
1	370046	230 VAC	3/8"	60	11.5	Z610A
1	370047	230 VAC	1/2"	66	13.5	Z610A
1	370048	230 VAC	3/4"	79	18	Z610A

L182_B series

1

technical data:
temperature range -10 up to +90°C
membranes NBR (water)
pressure max 12bar
pressure min 0,35bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370480	230 VAC	1"	105		ZB10A

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

3-way

L334-V series

1

technical data:
temperature range 0 up to +130°C
membranes FPM
pressure max 10bar
pressure min 0bar

fig.	Part No.	supply	DN (mm)	coil type
1	370080	230 VAC	2.3	ZA30A

L377-B series

1

technical data:
temperature range -10 up to +90°C
membranes NBR (water)
pressure max bar
pressure min bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type
1	370210	230 VAC	1/8	26.5	1.6	Z610A

solenoid valves steam (water)

2-way

L120-Vo2 series

1

technical data:
temperature range -10 up to 155°C
coil type Z110A
membranes FPM
pressure max 20bar
pressure min bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370064	24 VAC	1/8"	32	2.3

L121 series

1

technical data:
temperature range -10 up to 140°C
pressure max 8bar
pressure min 0,1bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type	membranes
1	370228	230 VAC	1/4"	42	2.3	ZA30A	Viton
1	370084	230 VAC	1/4"	42	3.2	ZA34A	EPDM

L140-D series

1

technical data:
temperature range -10 up to 100°C
coil type Z610A
membranes EPDM

fig.	Part No.	supply	connection	L (mm)	DN (mm)	p max (bar)	p min (bar)
1	370705	24 VAC	3/4"	61	10	10	0.35
1	370729	24 VAC	3/4"	61	10	10	0.35
1	370731	24 VAC	3/4"	61	10	10	0.35
1	370730	230 VAC	3/4"	61	10	10	0.35

L145-R series

1

2

technical data:
temperature range -60 up to +170°C
membranes PTFE (steam)
pressure min 0,4bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)	coil type	p max (bar)
1	370324	24 VAC	3/4"	79	16	Z534A	6
1	370077	230 VAC	3/8"	60	10	Z614A	8
1	370322	230 VAC	1/2"	66	10	Z614A	8
1	370323	230 VAC	3/4"	79	16	Z534A	6
2	370085	230 VAC	1"	105	18.5	Z534A	8

L153-D series

1

technical data:
temperature range -10 up to 140°C
coil type Z134A
membranes EPDM (steam/water)
pressure max 8bar
pressure min 0,1bar

fig.	Part No.	supply	connection	L (mm)	DN (mm)
1	370314	24 VAC	1/2"	66	11.5
1	370325	24 VAC	3/4"	79	17
1	370264	230 VAC	1/2"	66	11.5
1	370079	230 VAC	3/4"	79	17

spare parts and accessories

solenoid coils

1

fig.	Part No.	supply	power (VA)	coil type	seat ø (mm)
1	371086	24 VAC	4	ZB10A	10
1	371070	24 VAC	10	Z610A	10
1	371158	24 VAC	10	Z614A	10
1	371075	24 VAC	14	Z530A	12
1	371068	24 VAC	14	Z534A	12

Table continues overleaf

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

1

fig.	Part No.	supply	power (VA)	coil type	seat ø (mm)
1	371178	24 VAC	24	Z110A/Z114A/Z134A	14
1	371099	24VDC	5.5	ZB10A	10
1	371069	24VDC	6	Z610A	10
1	371049	24VDC	12	ZA30E	14
1	371078	24VDC	13	Z110A/Z114A/Z134A	14
1	371076	24VDC	14	Z530A	12
1	371085	230 VAC	4	ZB10A	10
1	371071	230 VAC	10	Z610A	10
1	371159	230 VAC	10	Z614A	10
1	371074	230 VAC	14	Z530A	12
1	371067	230 VAC	14	Z534A	12
1	371047	230 VAC	14	ZA30A	14
1	371176	230 VAC	14	ZA34A	14
1	371077	230 VAC	24	Z110A/Z114A/Z134A	14

membranes

1 2

fig.	Part No.	connection	series	membrane type
1	371171	1/2	L180-B	NBR (water)
1	371172	3/4"	L180-B	NBR (water)
2	371163	1/2"	L140-B	NBR (water)

solenoid valves (various)

1 2 3

fig.	Part No.	supply	inlet	suitable for	Ref. No.
1	370665	24 VAC	1/8"	Bonnet Roller Grill	1049474 SB10018
2	370523	230 VAC		Cookmax Melitta	11753 11753
3	370748	230 VAC	1/8"	MKN	201141

4 5 6

fig.	Part No.	supply	inlet	suitable for	Ref. No.
4	370236	230 VAC	1/4"	NuovaSimonelli	04100024
5	370634	230 VAC	1/4"	NuovaSimonelli	04100005
6	370713	230 VAC	3/8"	MIWE	505212.45

7 8

fig.	Part No.	supply	inlet	suitable for	Ref. No.
7	370378	230 VAC	1/2"	Electrolux Sirai Zanussi	0C2390 L621B03 1L ZA34A 0C2390
8	370738	230 VAC	3/4" ET	Elframo	00065310

drain valves

1 2 3

fig.	Part No.	volt. (V)	inlet (mm)	outlet (mm)	suitable for
1	401889	12	40	40	Fagor FIBER Rational
2	370790[1]	24	12.5	15.5	Icematic
3	371107	24	50	50	ATA Bonnet

[1]with accessories

4 5 6 7

fig.	Part No.	volt. (V)	inlet (mm)	outlet (mm)	suitable for
4	370621	230	17	17	Hobart
5	370720	230	17	19	Hobart
6	370642	230	40	40	Hobart
7	370629	230	46	1½" ET	Winterhalter

8 9 10

fig.	Part No.	volt. (V)	inlet (mm)	outlet (mm)	suitable for
8	371109	230	50	50	Lamber
9	371146	230	77	80	Grandimpianti
10	370721	240	17	19	Hobart

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

11

12

fig.	Part No.	volt. (V)	inlet (mm)	outlet (mm)	suitable for
11	370789	220-240			Fagor
12	371106	208/230	17.5	16	Icematic Scotsman

solenoid valves (gas)

ASCO

1

technical data:
pressure max 15bar
membranes FPM

fig.	Part No.	connection	L (mm)	coil type
1	370710	1/8”	33	400127-197

BRAHMA

solenoid valves

1

2

technical data:
CE Reg.no. 63AQ0626

fig.	Part No.	DN (mm)	connection	L (mm)	coil type	p max (bar)
1	101486	10	3/8”	56	13747002	0.5
1	101487	10	1/2”	56	13747002	0.5
2	101488[1]	15	1/2”	72	13922051	0.25
2	101490[1]	25	3/4”	96	13932000	0.3
2	101493[1]	40	1½”	138	13950200	0.2

[1]aluminium housing

3

technical data:
CE Reg.no. 63AQ0626

fig.	Part No.	DN (mm)	connection	L (mm)	coil type	p max (bar)
3	101948[1]	15	1/2”	72	18811003	0.5
3	106069[1]	25	3/4”	96	18813004	0.5
3	106071[1]	30	1”	111	18813014	0.5

[1]aluminium housing

spare parts and accessories

solenoid coils

1

2

fig.	Part No.	supply	power (VA)	seat ø (mm)	coil type
1	101521	230 VAC	20	17	13742002
1	101968	230 VAC	20	17	13902001
1	101522	230 VAC	20	17	13922051
2	101524	230 VAC	35	30	13942000
2	106070	230 VAC	37	30	18813004
2	106072	230 VAC	37	30	18813014

BÜRKERT

1

2

technical data:
pressure max 0,5bar
CE Reg.no. CE-0085AS0391
membranes NBR

fig.	Part No.	DN (mm)	connection	L (mm)
1	370281	12	1/2”	74.5
2	370282	20	3/4”	100

DUNGS

1

technical data:
CE Reg.no. 63AQ0626

fig.	Part No.	volt. (V)	connection	L (mm)	p max (bar)
1	107534	230	1/2”	65	0.36
1	107535	230	1”	75	0.36

TECNOCONTROL

solenoid valves

1

technical data:
pressure max 0,55bar
membranes NBR

fig.	Part No.	type	volt. (V)	connection	reg. no.
1	104648	NC	230	3/4”	0068
1	104539	NC	230	1”	0068

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

2

technical data:
pressure max 0,55bar
membranes NBR

fig.	Part No.	type	volt. (V)	connection	reg. no.
2	102941	NO	230	1/2”	-
2	102942	NO	230	3/4”	-
2	102943	NO	230	1”	0497

accessories

1

fig.	Part No.	description
1	107348	solenoid coil TECNOCONTROL 230V AC 9VA
1	107349	solenoid coil TECNOCONTROL 24V AC 17VA

solenoid valves (refrigeration)

CASTEL

valves

technical data:
voltage 230V
temperature range -35 up to 110°C

pos.	Part No.	type	p max (bar)	connection
1	370765	NC	45	3/8”

valve bodies

technical data:
type NC
pressure max 45bar
temperature range -35 up to 105°C

pos.	Part No.	DN (mm)	connection
1	370151	2.2	1/4” soldering connection
2	370382	3	10mm soldering connection
3	370383	7	10mm soldering connection
4	370384	7	12mm soldering connection
5	370386	12.5	16mm soldering connection
6	370385	12.5	12mm soldering connection
7	370387	12.5	22mm soldering connection

technical data:
type NC
pressure max 45bar
temperature range -35 up to 105°C

pos.	Part No.	DN (mm)	connection
1	370150	2.5	1/4” SAE
2	370788	2.5	3/8” SAE
3	370152	7	3/8” SAE
4	370153	12.5	1/2” SAE
5	370381	16.5	5/8” SAE
6	370154	16.5	3/4” SAE

1

2

fig.	Part No.	supply	power (VA)	freq. (Hz)	connection
1	371042	24VAC	8	50/60	DIN plug big
1	371301	110VAC	8	50/60	DIN plug big
1	371041	230VAC	8	50/60	DIN plug big
2	371084	230VAC	8	50/60	cable 1000mm

DANFOSS

valve bodies

technical data:
temperature range -40° up to 105°C

pos.	Part No.	type	p max (bar)	DN (mm)	connection
1	370159	EVR 3	45.2	3.2	7/16” UNF (1/4” SAE)

spare parts and accessories

1

2

fig.	Part No.	description
1	371004	solenoid coil DANFOSS 220/230V AC 10VA 50/60Hz
2	371040	solenoid coil DANFOSS type EVR 230V

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

PARKER

valves

1

2

3

fig.	Part No.	volt. (V)	connection
1	370782	230	16mm soldering connection
2	370415	230	4mm soldering connection
3	370783	230	6mm soldering connection

4

fig.	Part No.	volt. (V)	connection
4	370784	230	6mm soldering connection

various

valves

1

2

technical data:
supply 230 VAC

fig.	Part No.	type	p max (bar)	connection
1	370757	MDF-A03-6H001	4.5	solder connection 10mm
2	370666	NEV-202DXF 2251 J		6mm soldering connection

valve bodies

1

2

fig.	Part No.	type	connection
1	370478		6mm soldering connection
2	370191	CLS 2.5	6mm soldering connection
2	370190	ILS 1.5	6mm soldering connection
2	370192	RLS 1.9	6mm soldering connection

spare parts and accessories

solenoid coils

1

fig.	Part No.	volt. (V)	freq. (Hz)
1	371045	230	50/60

accessories

union nuts

1

2

3

fig.	Part No.	type	size	pipe ø	Int. Code
1	750050	7010/22	1/4" SAE	1/4" - 6mm	NS4-4
1	750460	7010/33	3/8" SAE	3/8"	NS4-6
1	750463	7010/44	1/2" SAE	1/2"	NS4-8
1	750065	7010/55	5/8" SAE	5/8" - 16mm	NS4-10
2	750057	7020/32	3/8" SAE	1/4" - 6mm	NRS4-64
2	750462	7020/43	1/2" SAE	3/8"	NRS4-86
2	750461	7020/54	5/8" SAE	1/2"	NRS4-108
3	750051	7030/3M8	3/8" SAE	8mm	-
3	750052	7030/3M10	3/8" SAE	10mm	-
3	750053	7030/4M10	1/2" SAE	10mm	-
3	750054	7030/4M12	1/4" SAE	12mm	-
3	750063	7030/5M12	5/8" SAE	12mm	-
3	750064	7030/5M14	5/8" SAE	14mm	-
3	750055	7030/6M14	3/4" SAE	14mm	-
3	750056	7030/6M18	3/4" SAE	18mm	-

solenoid valves for vacuum machines

1

2

3

fig.	Part No.	description
1	370520	solenoid valve 2-way 24 VACV inlet 1/4"mm outlet ø4
2	370507	solenoid valve 2-ways 24 VAC L 31mm DN 3,3mm 1/8" brass
3	370501	solenoid valve assembly 1/2" hose connector ø 10mm 24V coil type VA12 JP
3	370500	solenoid valve assembly 1/2" hose connector ø 7,5mm 24V coil type VA12 MJ

4

5

6

fig.	Part No.	description
4	370512	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 2 coils J35/J42/B35
5	370514	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 3 coils H200+SA
6	370504	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 B35+SA 3 coils

Pełną ofertę części zamiennych znajdziesz na gastroparts.com

7

8

9

fig.	Part No.	description
7	370505	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 B42(XL)+SA 3 coils
8	370502	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 J35
8	370503	solenoid valve assembly 1/2" hose connector ø 21mm 24V coil type VA12 J42
9	692064	solenoid valve assembly 1/2" hose connector ø 6mm 24V H200

10

11

12

fig.	Part No.	description
10	370513	solenoid valve assembly 24 VAC inlet 1/2" outlet 10,5mm 2 coils coil type VA12 1/2" JP
11	370511	solenoid valve assembly 24 VAC inlet 1/2" outlet 7,5mm 2 coils coil type VA12 1/2" MJ
12	370787	solenoid valve assembly 24 VAC inlet 1/2" outlet 7,5mm 2 coils coil type VA12 1/2" MJ

13

fig.	Part No.	description
13	370506	solenoid valve brass 3-ways 24V L 35mm 1/8" body inner cone DN 2,8mm

GASTROPARTS.COM

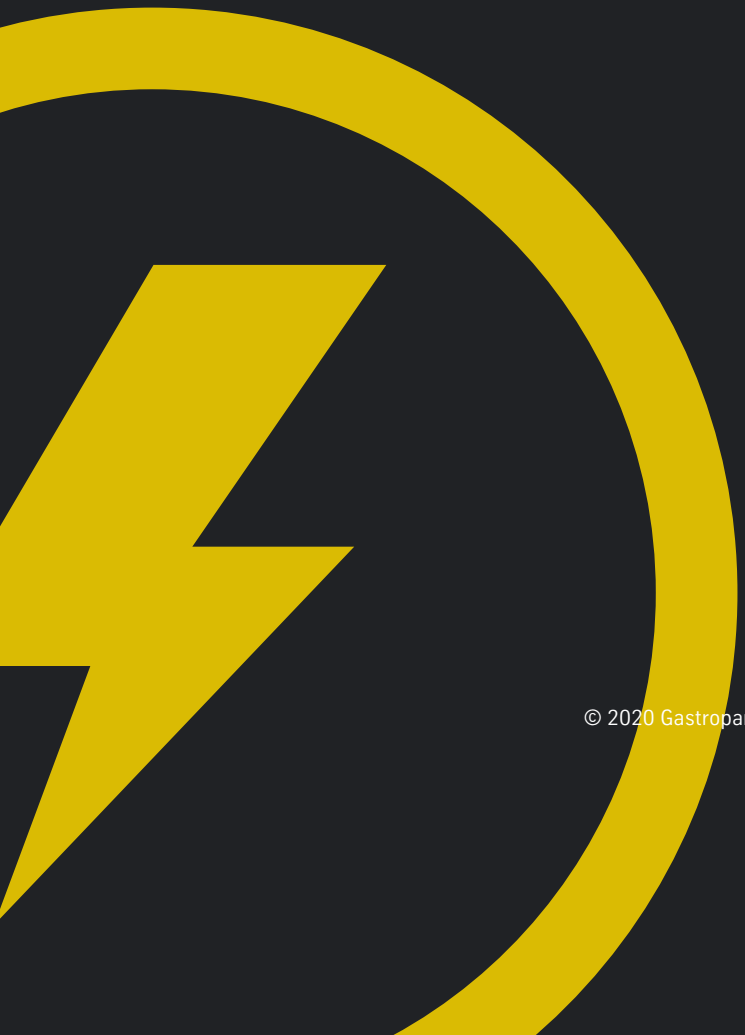

© 2020 Gastroparts Sp. J. All rights reserved.